





Technology of TSM-900RS

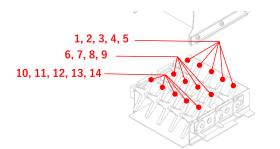

Sushi Rice Condition Control

14 paddles in 3 group can distribute sushi rice evenly.

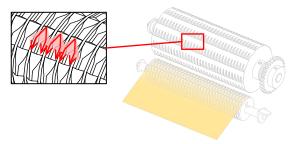


Sushi rice feeding technology

The surface of rice feeding rollers were developed as pressing and spreading technology as utility model patent.





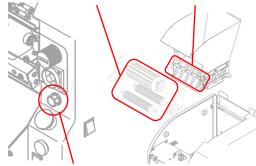

Density volume

Rice Sheet Condition Adjustment

Rice sheet condition adjustment technology for delicious sushi rice making. The density setting dial is speed adjustable controller for rice feeding paddles that lead to the rice feeding rollers which spread rice to become sushi rice sheets. If insufficient rice is unevenly spared, insubstantially or unevenly, density setting dial needs to be set higher. On the other hand, if the rice sheet becomes tight, hard or heavy, density volume dial needs to be set lower. In order to adjust easily, density volume dial could be set manually.



PRODUCT QUALITY



HIGH GRADE MOTORDurable and high quality silent Japanese motor.




OVER HEAT PROTECTION High performance with overheat and overload protection.



PROTECTION
Safety protection device to protect against over current and lightning.

OVERCURRENT



COMPATIBLE SENSOR
The sensor IP67 type is fully waterproof and oil resistant.



SUS304
Main parts are 304 type stainless steel for rust resistance and strength of structure.



NON STICK PARTS
A durable, highperformance plastic that
does not adhere to sushi
rice.



NON STICK COATING
The hopper is treated
with Dupont-Tefloncoating so that sushi rice
does not stick.



BODY COVER
Body material is selected for protecting from shock, dirt and heat.



ENERGY
CONSERVATION
Power consumption is only
120 watts at maximum.



OVERSEASIt corresponds to the standard such as UL,CSA, NSF and CE.

STANDARDS FOR

HIGH PERFORMANCE FUNCTION-1



EASY OPERATION

Setting machine takes 3 minutes.



START BUTTON

Just pressing the button to make a rice sheet.



1 sheet per 6 sec

It can make one sheet per 6 seconds only. (M size)



LEFT OVER RICE REMOVING SYSTEM

Left over rice can be removed by rice removing system.



WIDTH OF RICE SHEET

The width of rolled sushi is 180mm or 200mm. Width is selected at the time of ordering the machine.




ALART SYSTEM

An alarm will notify you when the remaining amount of sushi rice is low.



SAFETY DESIGN

It is safe because it stops when the front cover is opened.

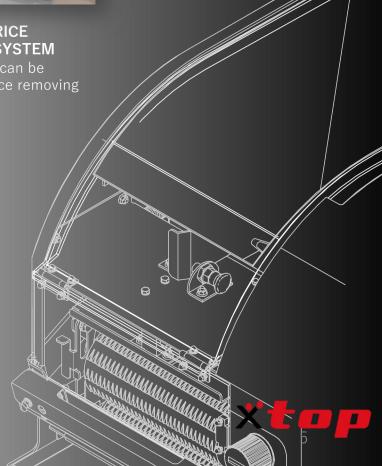

HIGH PERFORMANCE FUNCTION-2



EASY REMOVAL Parts can be removed in 60 seconds.



EASY CLEANING Non rice-stick parts can be washed easily by hand or dishwasher.



Hygiene control Parts can be removed and washed easily for hygiene control.




MADE IN JAPAN Professional sushi machine craftsmen make machines accurately and



SIMPLE DESIGNING Body material is selected for protecting from shock, dirt and heat.



Electric parts The main electric parts are harness type, making it easy to replace them in case of failure.

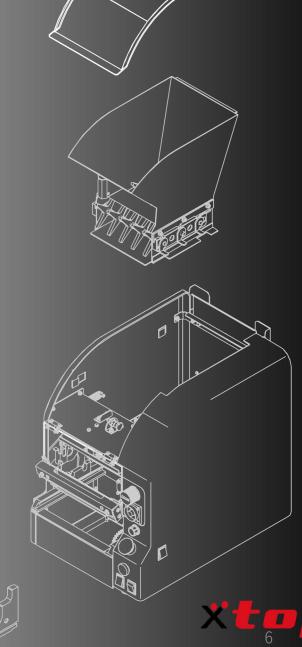



SPECIFICATIONS



Product Name	Sushi Rice Sheet machine	
Туре	TSM-900RS	
Body Dimensions	W380x D550 (Max800) x H500mm	
Body Weight	39kg	1
Power Supply	AC100-120V 50Hz/60Hz 1.2A AC220-240V 50Hz/60Hz 0.6A	
Power Consumption	120W	



BENEFITS AND COMPARISON



Sushi beginner

Difficult to make high quality Sushi rolls

uneven weight and volume of balls

Not uniformed shape

Uneven softness or hardness

Wasting ingredients more

Needs to provide long training hours

Needs high skill and experiences of sushi

Needs to take some break or rest

Takes longer and cost more

Quit a job any time

 $1\;\mbox{sheet}\;/\;12\mbox{sec}$, $100\;\mbox{sheets}\;/\;20\;\mbox{minutes}$





Rice sheet machine

Easy to make high quality Sushi rolls

Even weight and rice volume

Even and uniformed shape

Controlled softness or hardness

Less wasted ingredients

No training needed

High skill of experience of sushi making is not needed.

No need to take any breaks or rest

Takes shorter time

Works forever

 $1 \, \text{sheet} \, / \, 6 \, \text{sec}$, $100 \, \text{sheets} \, / \, 10 \, \text{minutes}$

